TLVR Series
Molding Power Inductors
Size 110475

FEATURES

-
- Higher current carrying Capacity, lower DCR, and more e ciency.
- Opera ng temperature: -55 to +125 °C(Including self - temperature rise).
- Quan ty: 500PCS

APPLICATION

- AI Servers, Data Centers, GPU/AI Accelerators.
- Desktop Motherboards, CPU/GPU Power Delivery.
- Mul -phase VRM, High-current DC-DC Converters.
- Networking Equipment, Communica on Infrastructure.

Dimensions: [mm]

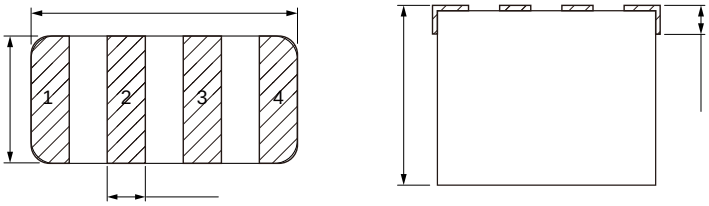

Land Pattern: [mm]

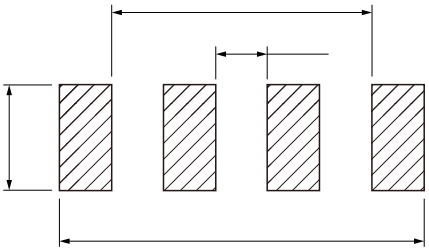

Schematic:



Electrical Properties:

Part No	Inductance (μH)	Tolerance	Resistance (mΩ)		Resistance (mΩ)		Rise Current		Rise Current		Satura on Current		

All test data is referenced to 25 °C ambient.
Saturation Current will cause L0 to drop approximately 30%.
Temperature Rise Current: The actual value of DC current when the temperature rise is △T=40 °C.

Soldering Reflow:

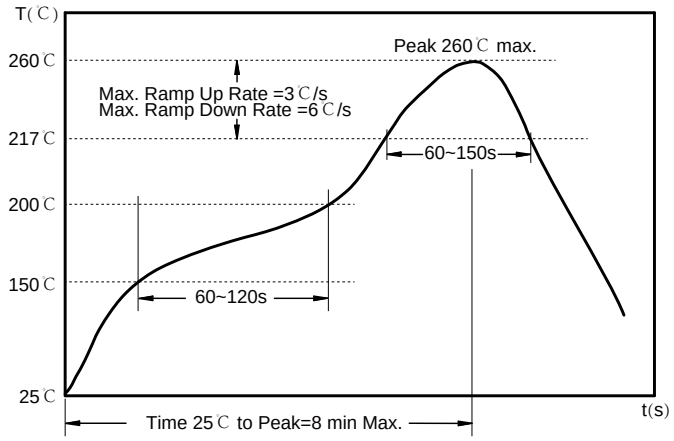

Preheat condition: 150 ~200 ℃/ 60~120 sec.

Allowed time above 217 ℃: 60~150 sec.

Max temperature: 260 ℃.

Time within 5 ℃ of actual Peak Temperature: 30 max. sec.

Packaging Information:

Tape Dimension:

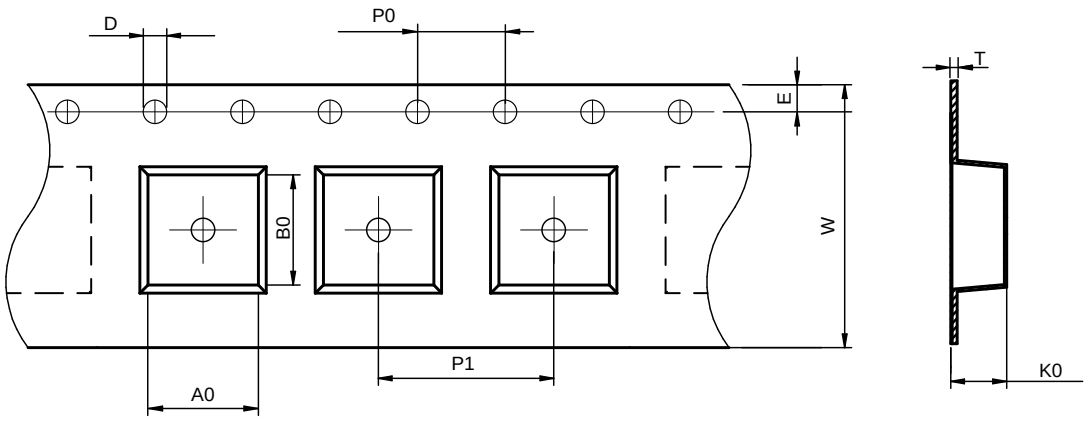

A0 (mm)	B0 (mm)	D (mm)	P0 (mm)	P1 (mm)	W (mm)	K0 (mm)	E (mm)	T (mm)

Product Marking:

Marking	Printing (Inductance)

Reel Dimension：[mm]

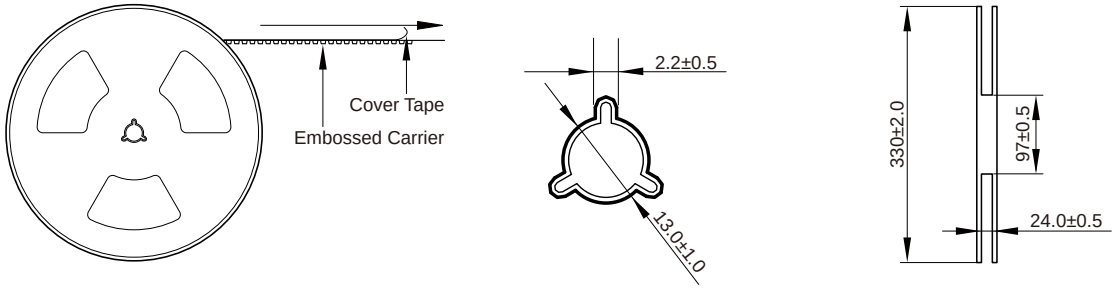

Packaging Quantity:

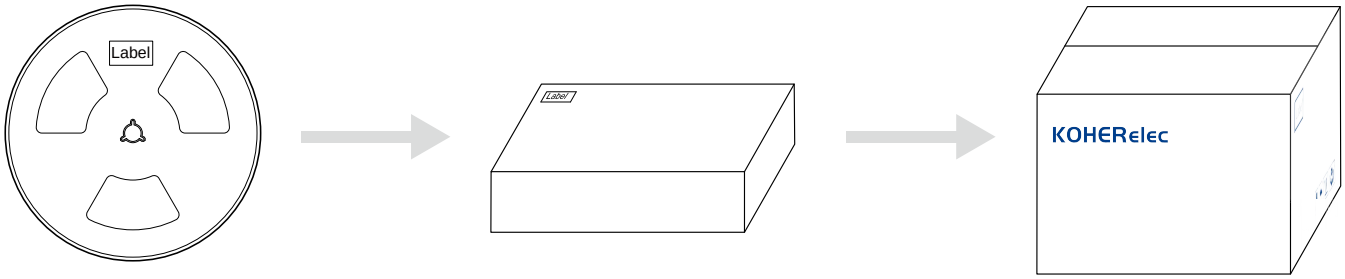

500 Pcs/Reel

2 Reel /Inner box(1000 Pcs)

3 Inner box/Carton box(3K Pcs)

Cautions and Warnings:

Storage Conditions：

- The storage period is within 12 months after the completion of production. Be sure to follow the storage conditions (temperature: -5 to 35°C, humidity: 75% RH Max).If the storage period elapses, the soldering of the terminal electrodes may deteriorate.The warranty period is one year.
- Product should not be exposed to environment with high temperature, high humidity, dust, corrosive gas and etc.
- Products should be handled with care to avoid damage or contamination from perspiration and skin oils.
- Please always handle products carefully to prevent any damage caused by dropping down or inappropriate removing.

Operation Instructions:

- Self heating (temperature increase) occurs when the power is turned ON, so the tolerance should be sufficient for the set thermal design.
- Before soldering, be sure to preheat components.The preheating temperature should be set so that the temperature difference between the solder temperature and chip temperature does not exceed 150°C.
- Soldering corrections after mounting should be within the range of the conditions determined in the specifications.If overheated, a short circuit, performance deterioration, or lifespan shortening may occur.
- Generally, Koher might not be familiar with either customer's specific application or actual requests as customer does.As a result customer shall be responsible for checking and confirming whether Koher product with the performance described in the product specification is suitable for using in customer's particular application or not.