















- Exclusive square type closed magnetic core designed as an
- Low profile design makes it optimal for surface mounting
- Excellent impedance characteristics, making it great for
- Maximum 15A can be used in 125°C environments
- Operating temperature range: -40 to +125°C
- AEC-Q200 qualified
- Quantity: 1500pcs




- for various DC power lines, multimedia devices, and




BCMA 7060-700Y	40	70	15	5	80	10
BCMA 7060-141Y	100	140	9.0	10	80	10
BCMA 7060-301Y	225	300	5.0	10	80	10
BCMA 7060-501Y	400	500	5.0	10	80	10
BCMA 7060-701Y	500	700	4.0	15	80	10
BCMA 7060-102Y	800	1000	3.0	17	80	10
BCMA 7060-132Y	910	1300	3.0	20	80	10
BCMA 7060-272Y	2000	2700	1.0	63	80	10
BCMA 7060-302Y	2500	3000	0.9	75	80	10

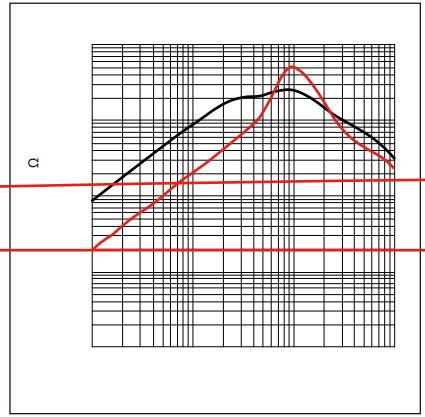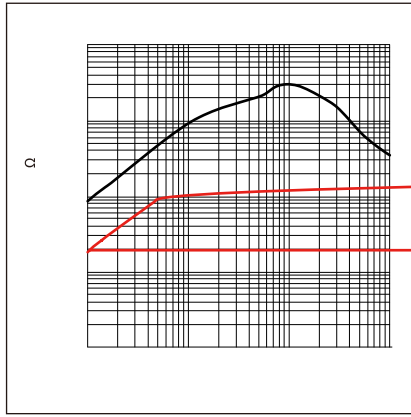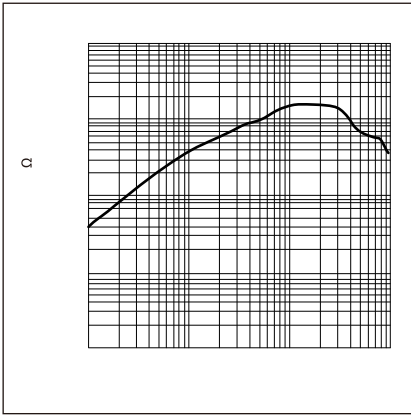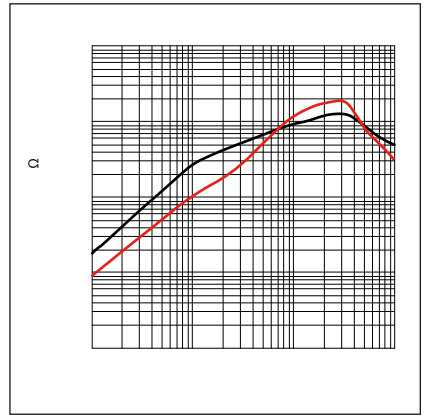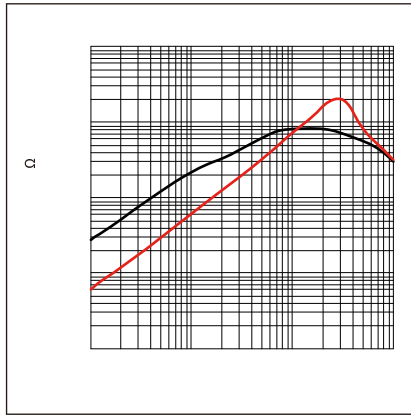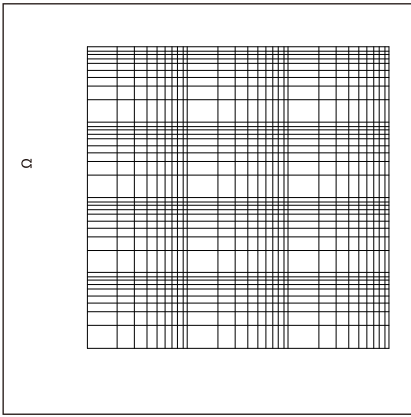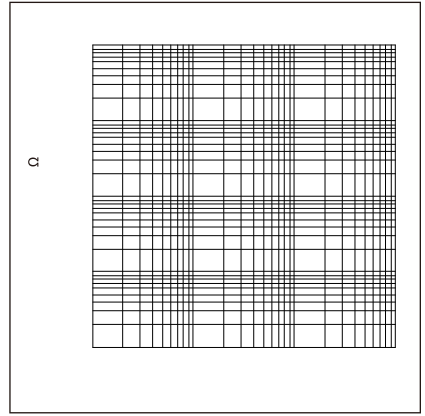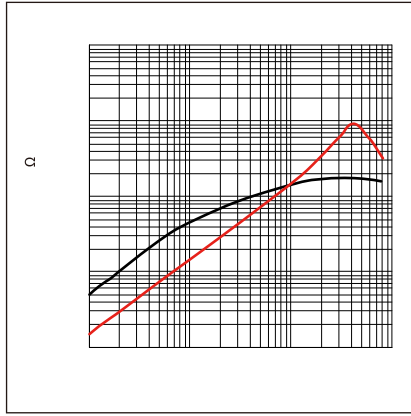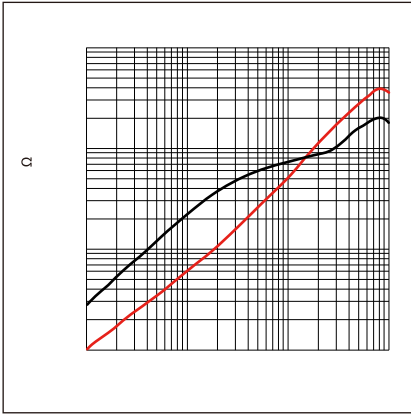

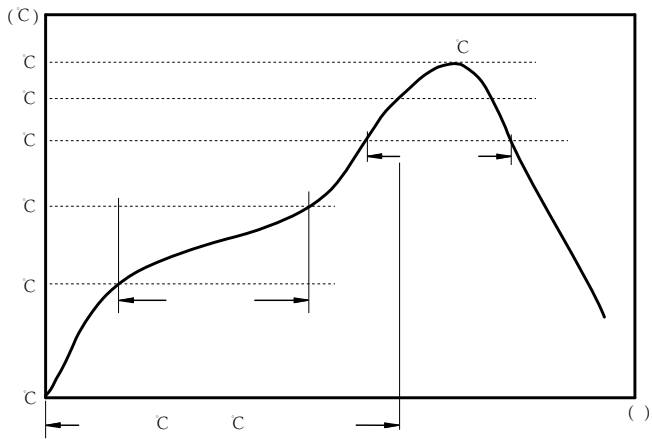


c
c
c

:

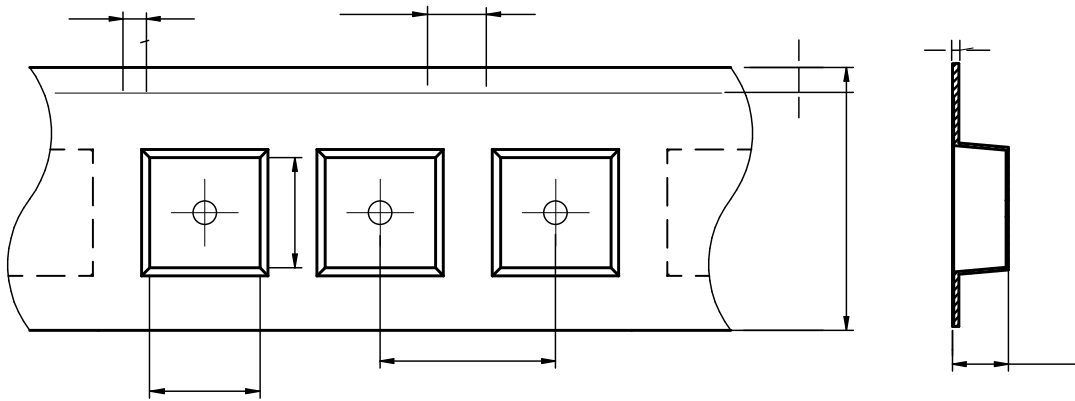

BCMA7060	6.25±0.1	7.7±0.1	1.5±0.1	4.0±0.1	12.0±0.1	16.0±0.3	3.6±0.1	1.75±0.1	0.40±0.05

Marking	Printing (Impedance)
---------	----------------------

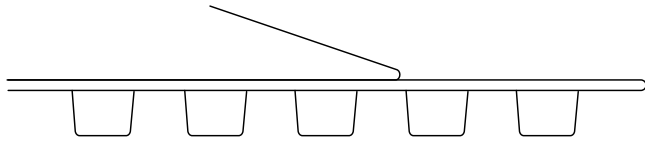

:



:

•

•

•

•

•

•

•

•

•

•

•

•

•