

FBHA S Series




FEATURES

- Noise reduction solution for power line.
- Compared to the other series, has low direct current resistance for compatibility with large currents, optimal for low power consumption. Various frequency characteristics with materials of different thicknesses for different measurements against everything from low-frequency signals to high-speed signals.
- Works well in signal lines where low direct current resistance is required.
- AEC-Q200 qualified
- Operating temperature: -55 to +150 °C (including self-temperature rise)
- Quantity: 3000 pcs









APPLICATION

- Power line filter for body controls, and car multimedia etc.

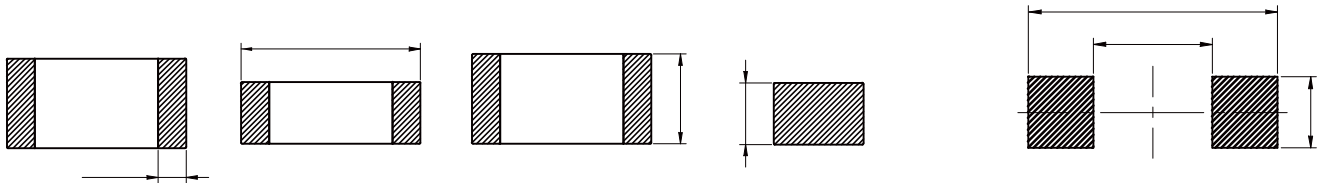


	(Ω)		(Ω)	(mA)
		0%		
		0%		
		0%		
		0%		
		0%		
		0%		
		0%		
		0%		




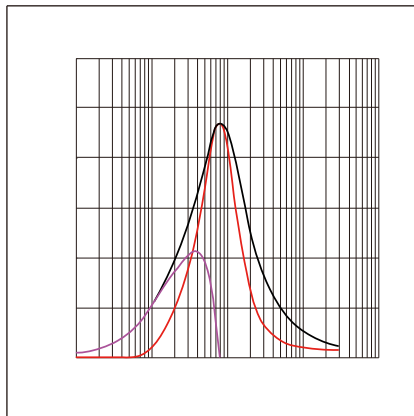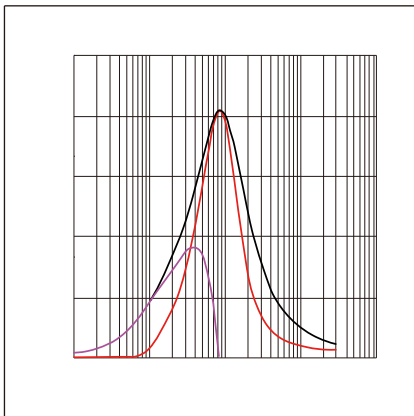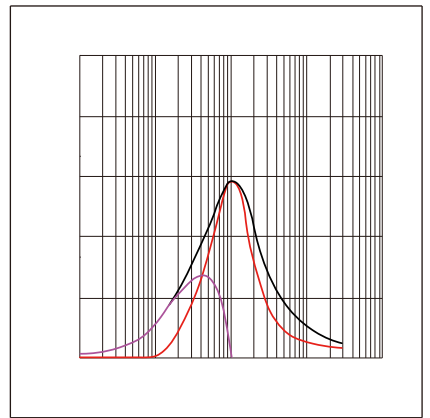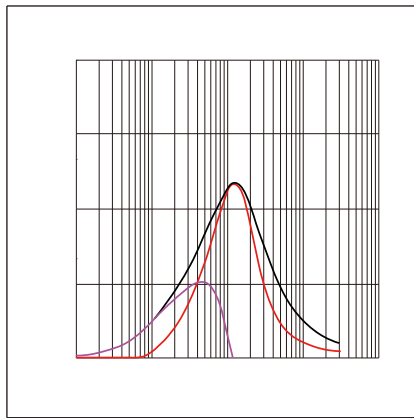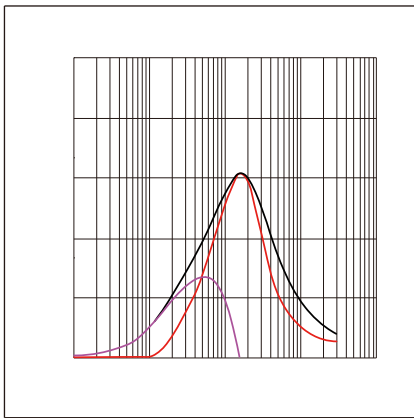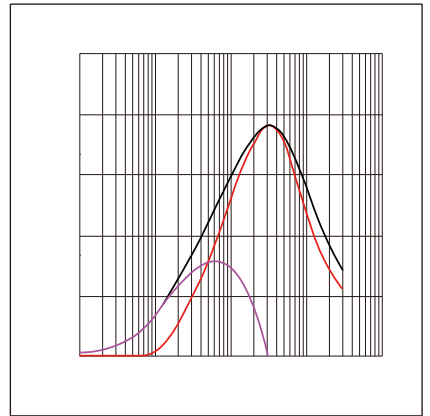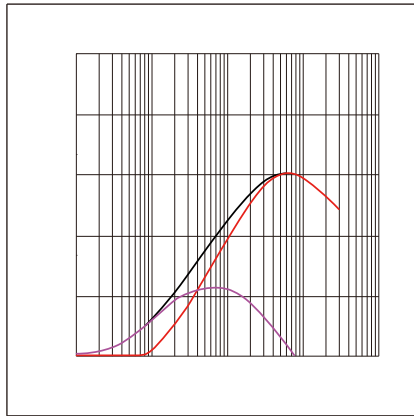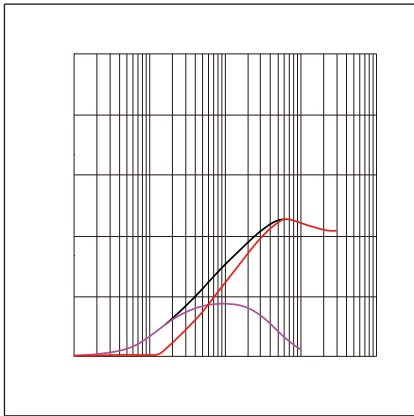


:



FBHA1206S	1.75± 0.1	3.35± 0.1	1.5± 0.1	4.0± 0.1	4.0± 0.1	8.0± 0.3	1.25± 0.1	1.75± 0.1	0.23± 0.05

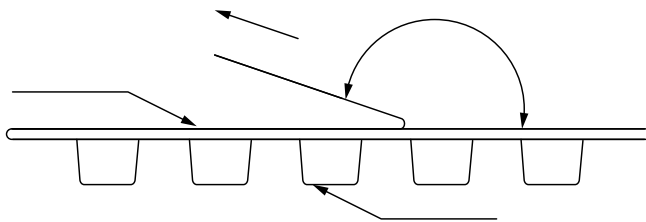

The peel force of top cover tape shall be between 0.14 to 0.58 N

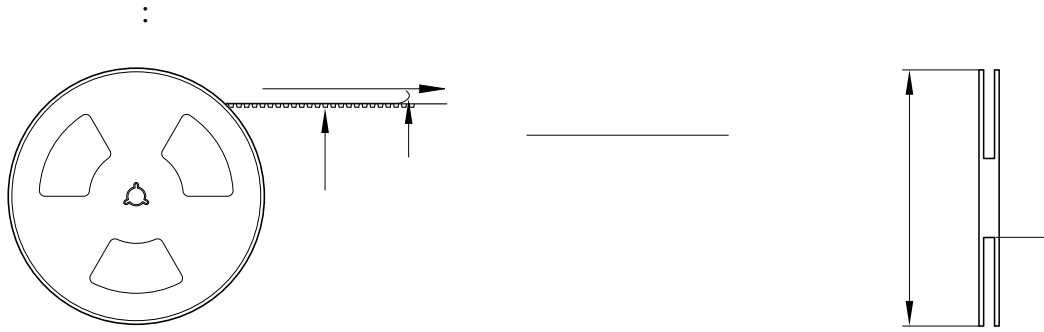

:

-
-
-
-
-
-
-
-
-