




- Monolithic inorganic material construction.
 - Closed magnetic circuit avoids crosstalk.
 - Suitable for reflow soldering.
 - Available in various sizes.
 - Quantity: 3000pcs
-
- Data lines and low power lines
 - Connection between digital and analog circuit

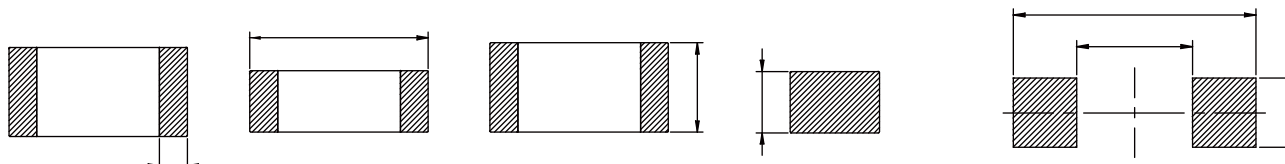

	(Ω)		(max) (Ω)	Current (max) (mA)
		±25%		
		±25%		
		±25%		
		±25%		
		±25%		
		±25%		
		±25%		
		±25%		
		±25%		
		±25%		
		±25%		
		±25%		

Operating Temperature: -55℃ ~ +125℃

Temperature rise current the actual value of DC current when the temperature rise is ΔT40℃

