



SMD Low Profile High Current Molded Inductor Size 7050




- High saturation current due to CIP material
- Nature air gap and no acoustic noise
- Different sizes available
- Quantity: 800pcs
- High current DC/DC converter
- LC filter

Dimensions: [mm]

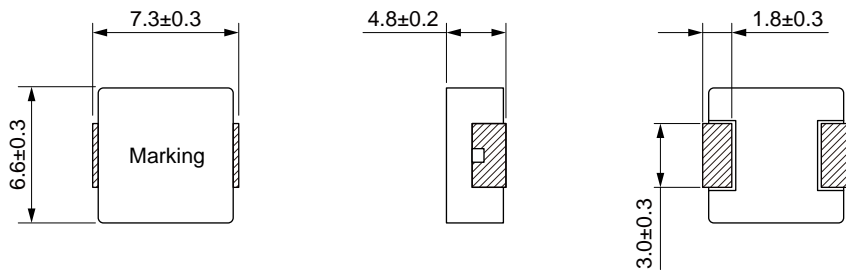

Land Pattern: [mm]



Electrical Properties:













	(μH)			Saturation	($\text{m}\Omega$)	($\text{m}\Omega$)
MD7050-R33M	0.33	$\pm 20\%$	25.0	32.0	2.50	3.00
MD7050-R47M	0.47	$\pm 20\%$	22.0	30.0	3.50	3.90
MD7050-R56M	0.56	$\pm 20\%$	20.0	27.0	3.60	4.20
MD7050-R68M	0.68	$\pm 20\%$	18.0	24.0	4.00	4.50
MD7050-R82M	0.82	$\pm 20\%$	15.0	22.0	4.60	4.90
MD7050-1R0M	1.00	$\pm 20\%$	15.0	20.0	6.10	6.50
MD7050-1R5M	1.50	$\pm 20\%$	12.0		8.60	9.00
MD7050-2R2M	2.20	$\pm 20\%$	10.0	14.0		12.0
MD7050-3R3M	3.30	$\pm 20\%$	8.00	12.0	19.0	20.9
MD7050-4R7M	4.70	$\pm 20\%$	6.50	10.0	28.0	30.8
MD7050-5R6M	5.60	$\pm 20\%$	6.00	9.00		49.0
MD7050-6R8M	6.80	$\pm 20\%$	5.50	8.50	46.0	
MD7050-8R2M	8.20	$\pm 20\%$	5.00	8.00	56.0	63.0
MD7050-100M	10.0	$\pm 20\%$	4.00	7.50	60.0	69.0
MD7050-150M	15.0	$\pm 20\%$	3.50	6.00	81.0	92.0
MD7050-220M	22.0	$\pm 20\%$	2.50	5.50	140	170
MD7050-330M	33.0	$\pm 20\%$	2.00	3.50		200

Operating temperature: -40°C \sim 125°C

Temperature rise current: The actual value of DC current when the temperature rise is $\leq 40^{\circ}\text{C}$

Saturation Current will cause L to drop approximately 30%

Typical Electrical Characteristics:

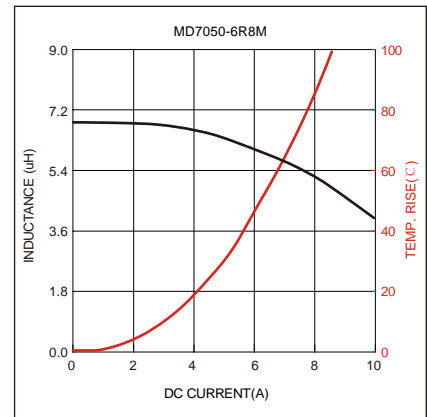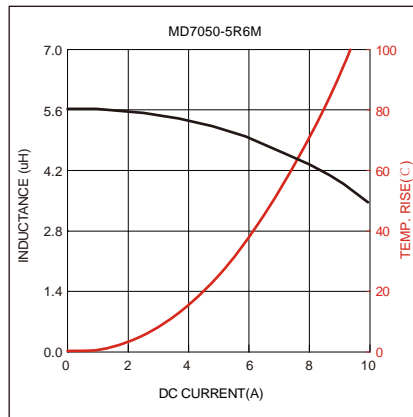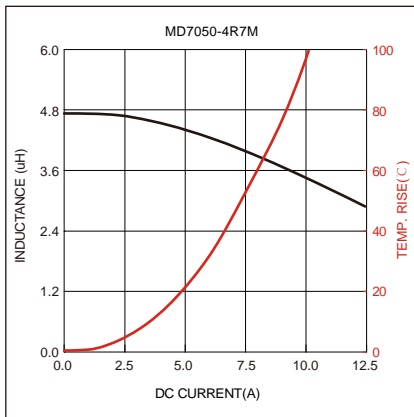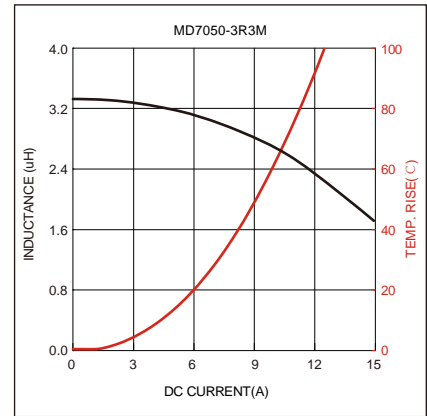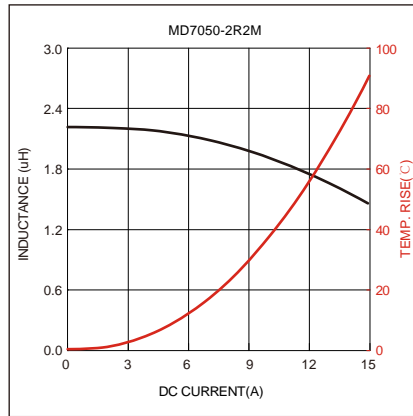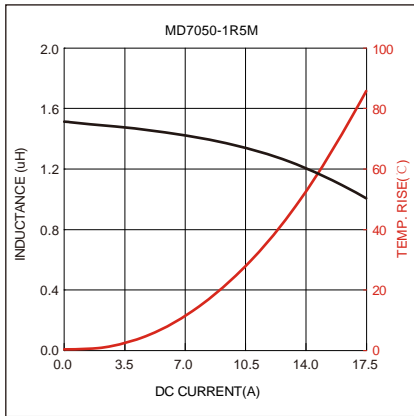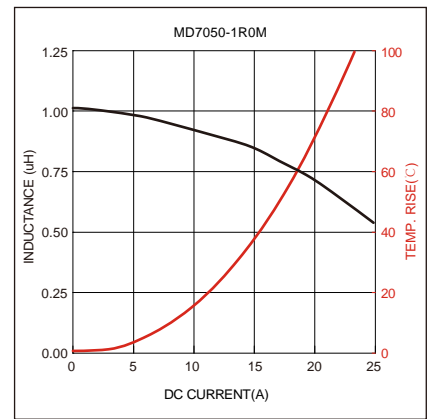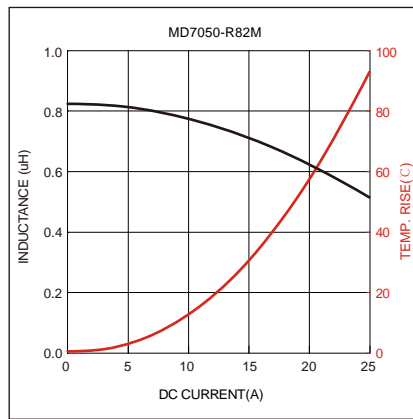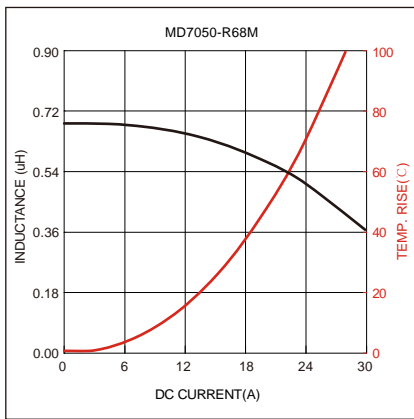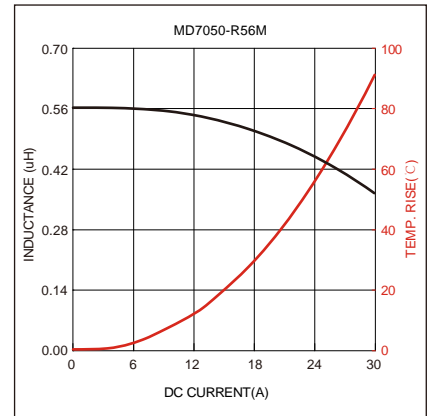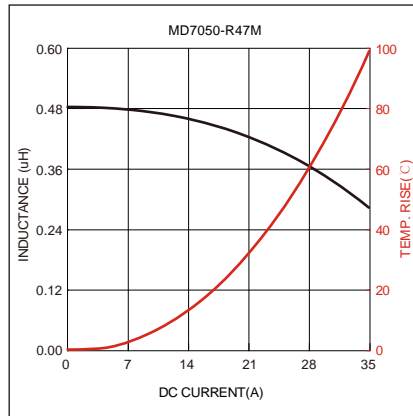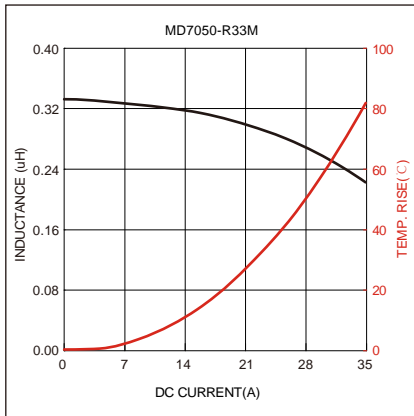

Typical Electrical Characteristics:

