








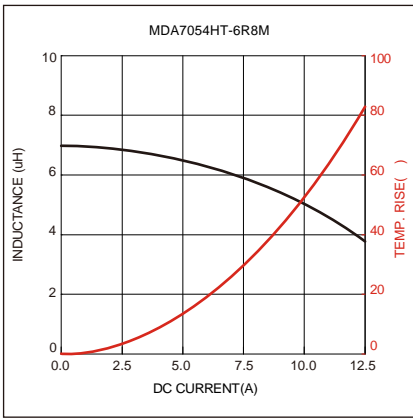


	( $\mu\text{H}$ )			Saturation	( $\text{m}\Omega$ )	( $\text{m}\Omega$ )


Typical Electrical Characteristics:

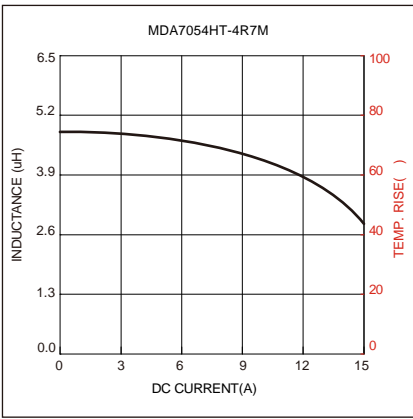

# Typical Electrical Characteristics:

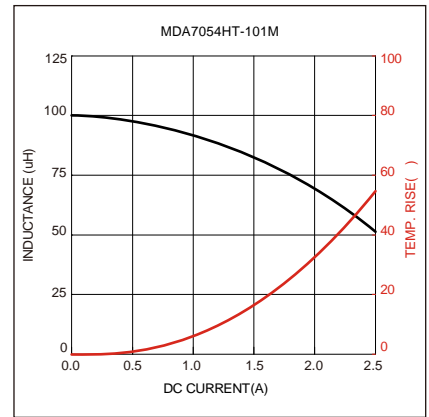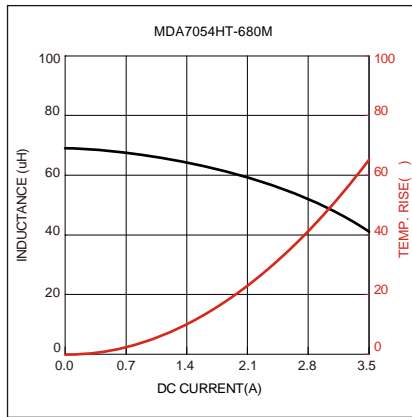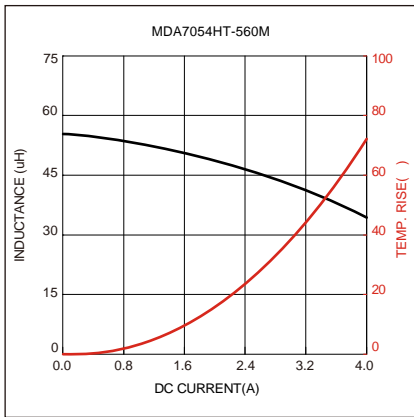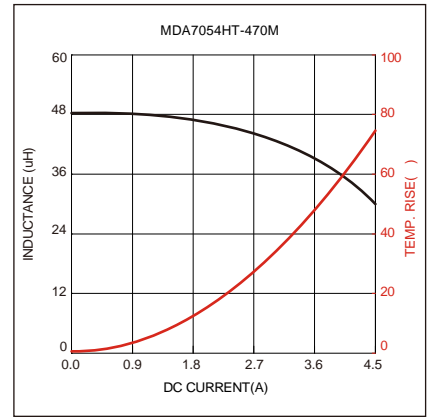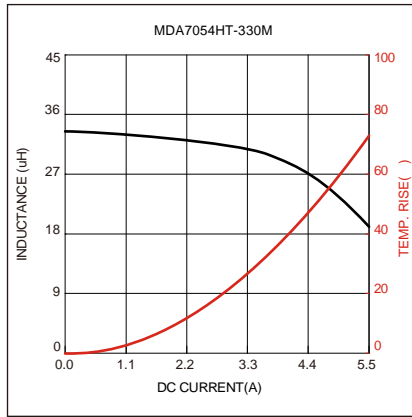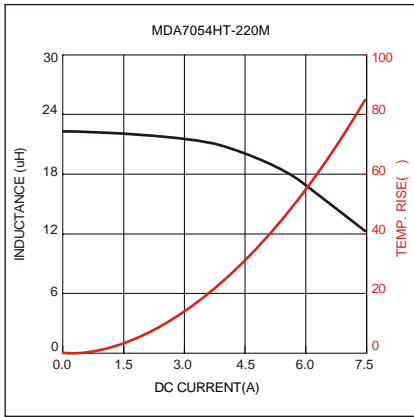

## Soldering Reflow:

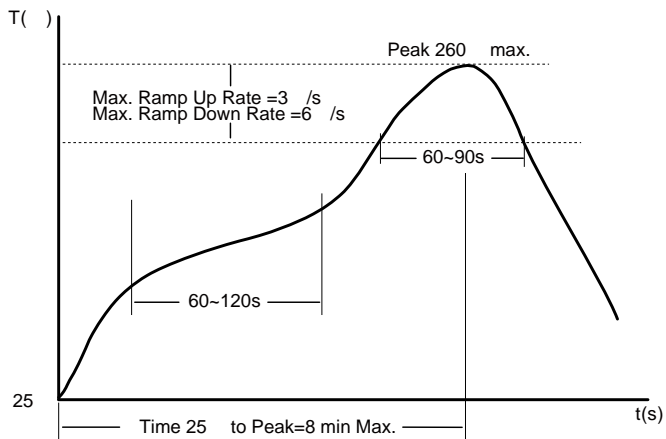

Preheat condition: 150 ~200 / 60~120 sec.

Allowed time above 217 : 60~90 sec.


Max temperature: 260 .

Allowed Reflow time: 2x max.

## Packaging Information:

Tape Dimension :

Peel force of top cover tape:

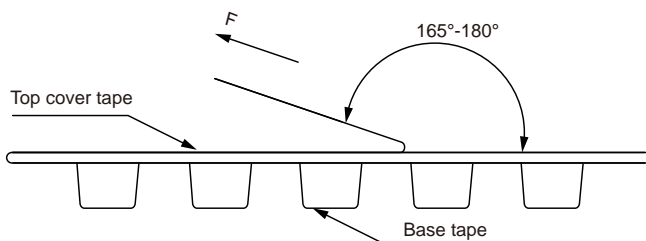


The peel force of top cover tape shall be between 0.1 to 1.3 N

Product Marking:

Marking	K+Printing Inductance+period)
---------	-------------------------------

Reel Dimension : [mm]

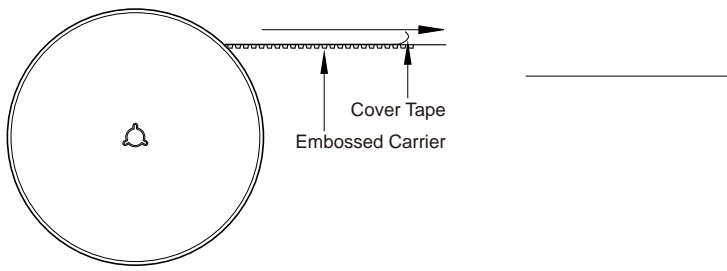

Packaging Quantity: