

MDTA Series

Flat Wire Molded Inductor

Size 1513




FEATURES

- Flat wire coil for low copper losses
- #
- †
- High current capability
- AE# j
- \ C @
- j


APPLICATION

-) #) #
- Noise suppressor for motor
- wipers / power seats/
- Q) ers

Dimensions: [mm]

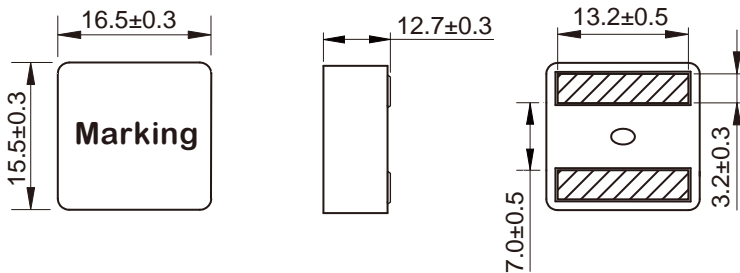

Land Pattern: [mm]

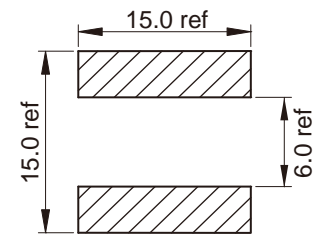

Electrical Properties:

U) u°	k U		±20%			
U) u°	k U		±20%			
U) u°	k U		±20%			
U) u°	k U		±20%			
U) u°	U		±20%			
U) u°	U		±20%			
U) u°	U	22	±20%			
U) u°	U		±20%			

Saturation Current will cause L to drop approximately 30%
 Temperature Rise Current that causes the specified temperature rise from 25°C ambient.




S

P



Reel Dimension: [mm]

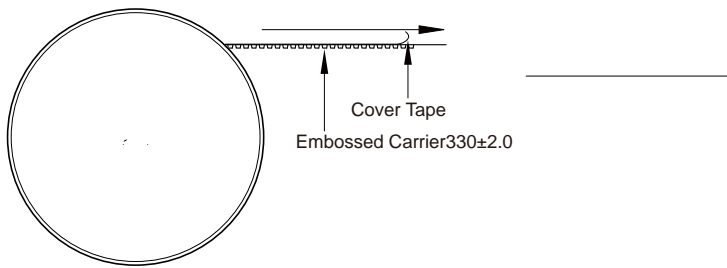

Packaging Quantity: