MDTA Series

FEATURES

- [illegible]
- Composoite core material allows high saturation currents
- Very low acoustic noise and very low leakage flux noise
- [illegible] n apability and handles high t ansien [illegible] n [illegible]k
- [illegible] C-Q200 qualified
- Operating temperature -55 to +155 ℃ (Including self - temperature rise)
- Quantity: 3000pcs

APPLICATION

- DC/DC converters for entertainment/navigation systems [illegible] ession [illegible] s: windshield [illegible] power mirrors / heating and ventilation blowers / HID lighting
- LED driv

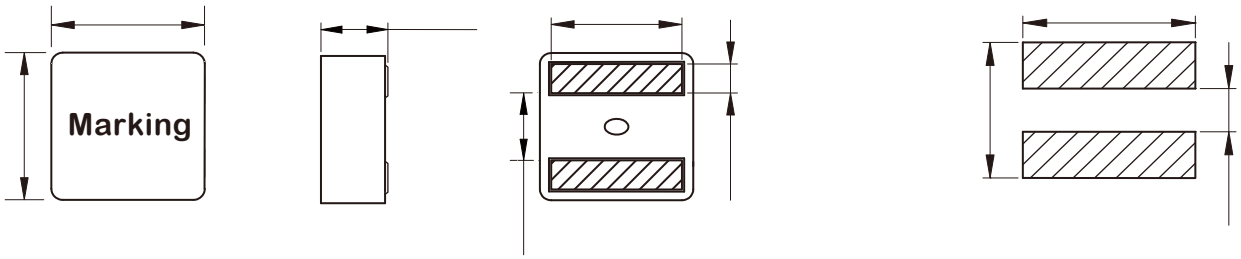

	(μH)		(A)	(A)		(mΩ)

KOHER Electronic
4546 BATES DRIVE, YORBLINDA CA 92886 USA
714-325-4789 Contact@kohergroup.com

℃

℃

℃

:

MDTA4020	4.5 ± 0.1	4.5 ± 0.1	1.5 ± 0.1	4.0 ± 0.1	8.0 ± 0.1	12.0 ± 0.3	2.3 ± 0.1	1.75 ± 0.1	0.35 ± 0.05

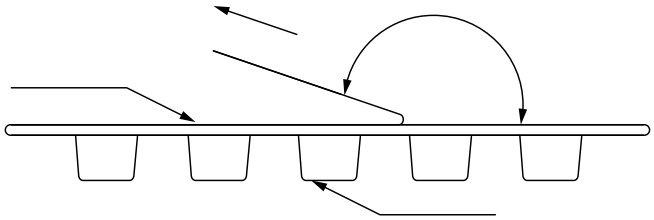

The peel force of top cover tape shall be between 0.1 to 1.3 N

: