

TLVR Series

Molding Power Inductors

Size 100510





FEATURES

-
-
-
-


APPLICATION

-
-
-
-

Dimensions: [mm]

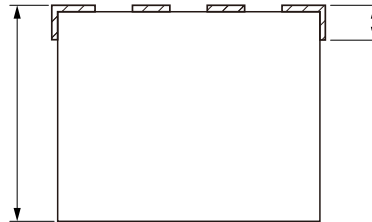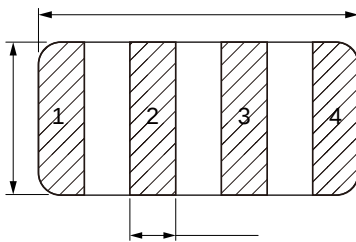

Schematic:



Electrical Properties:

Part No	Inductance 1-4/2-3 @ 100KHz/1V (μ H)	FLL 1-4 Min. (nH)	DC Resistance 1-4 (m Ω)	DC Resistance 2-3 (m Ω)	Temperature Rise Current Typ. (A)	Satura on Current Typ. (A)	Hi-Pot Min. (V)	Kps Min.

All test data is referenced to 25 °C ambient.


Saturation Current will cause L0 to drop approximately 30%.

Temperature Rise Current: The actual value of DC current when the temperature rise is $\Delta T=40$ °C.

FLL: tested @100 kHz, 1.0 Vrms, Isat, applied for +25 °C.

Hi-Pot: as pass / fail judgement, tested @ 2s,2mA, between 2 windings.

Soldering Reflow:

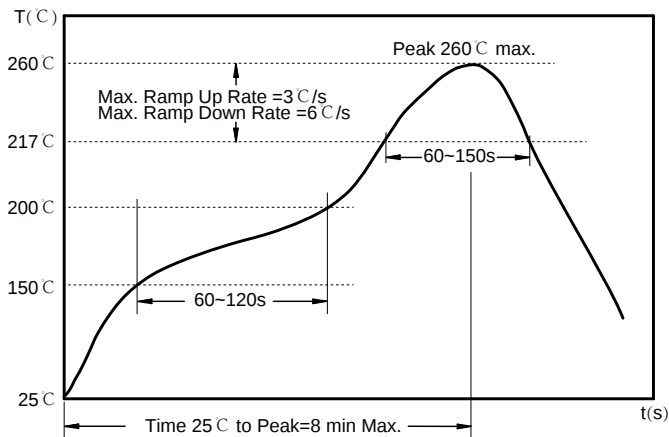

Preheat condition: 150 ~200 / 60~120 sec.


Allowed time above 217 : 60~150 sec.

Max temperature: 260 .

Time within 5 of actual Peak Temperature: 30 max. sec.

Packaging Information:

Tape Dimension:

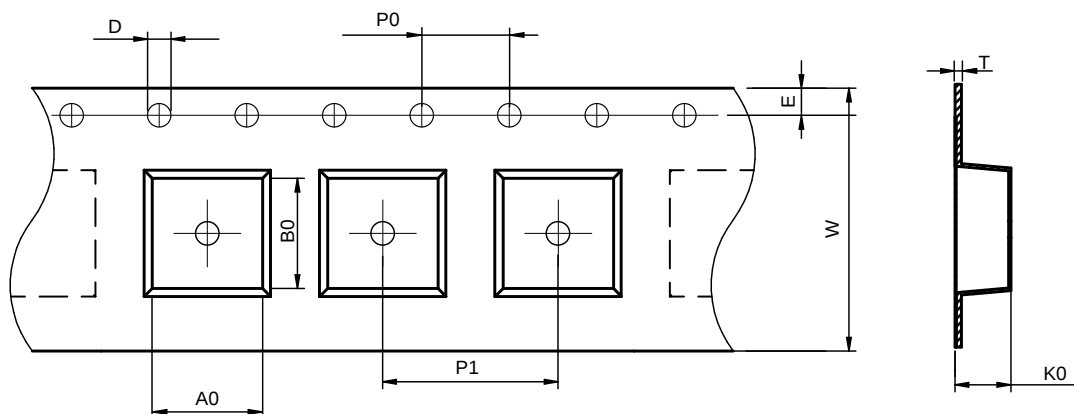

A0 (mm)	B0 (mm)	D (mm)	P0 (mm)	P1 (mm)	W (mm)	K0 (mm)	E (mm)	T (mm)

Product Marking:

Marking	Printing Inductance)
---------	----------------------

