

FBA Series

Chip Ferrite Bead SMD Type Size 0805




FEATURES

- Noise reduction solution for general signal line.
- Various frequency characteristics with 2 materials of different features for countermeasures against everything from general signals to high-speed signals
- AEC-Q200 qualified
- Operating temperature: -55° to +150°C
- Quantity: 4000pcs


APPLICATION

-

Dimensions: [mm]

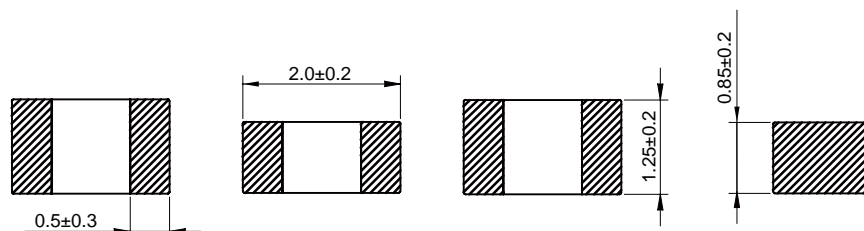

Land Pattern: [mm]

















Electrical Properties:

	Impedance @ 100MHz (Ω)		DC Resistance Max. (Ω)	Temperature Rise Current Max. (mA)
A0805-070-601R		±25%	0.10	600
FBA0805-110-901R	11			
FBA0805-170-601R	17			
FBA0805-260-601R	26			
FBA0805-300-601R	30			
FBA0805-400-601R	40			
FBA0805-600-901R	60			
FBA0805-121-801R	120			
FBA0805-151-801R	150			
FBA0805-221-751R	220			
FBA0805-301-701R	300			
FBA0805-471-701R	470			
FBA0805-601-501R	600			
FBA0805-102-401R	1000			
FBA0805-102-501R	1000			
FBA0805-152-351R	1500			
FBA0805-202-251R	2000			
FBA0805-202-401R	2000			

referring to 20K self-heating above ambient temperature

Typical Electrical Characteristics:

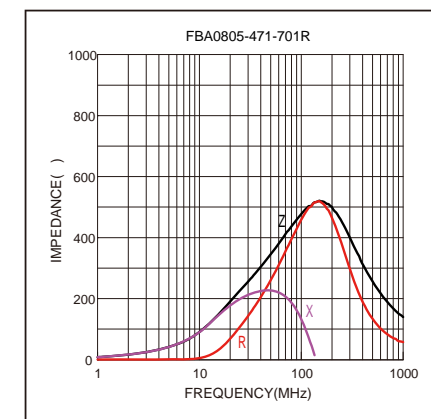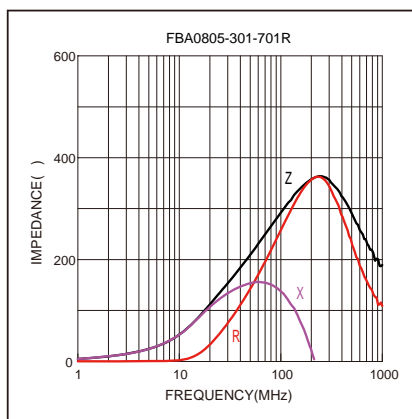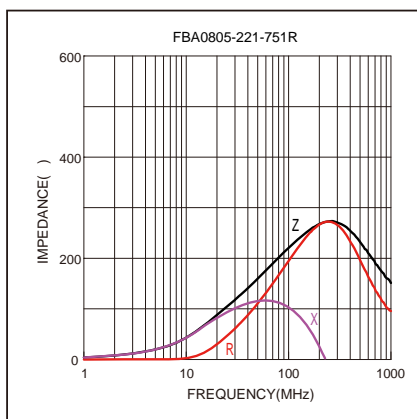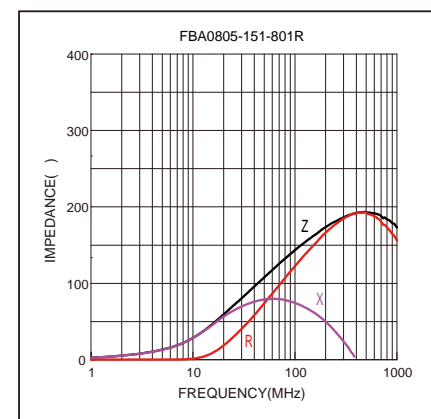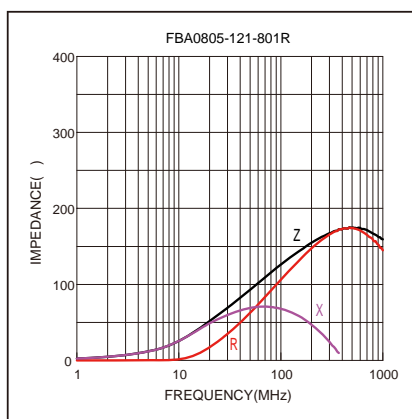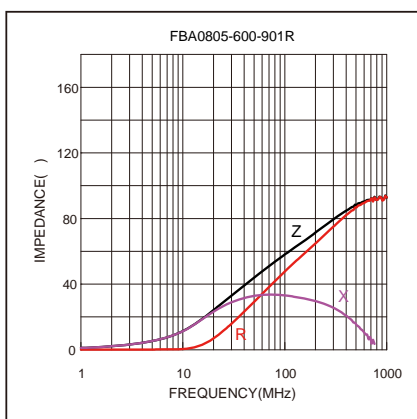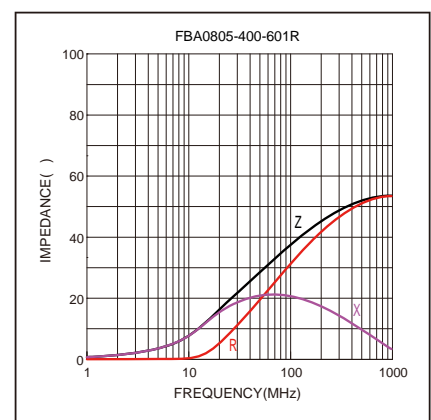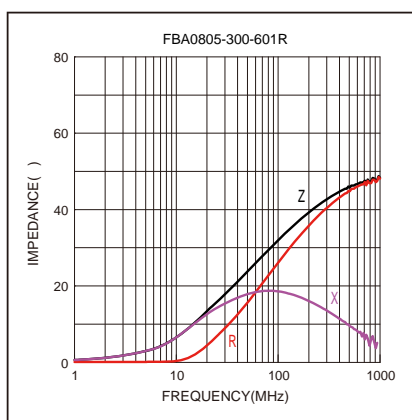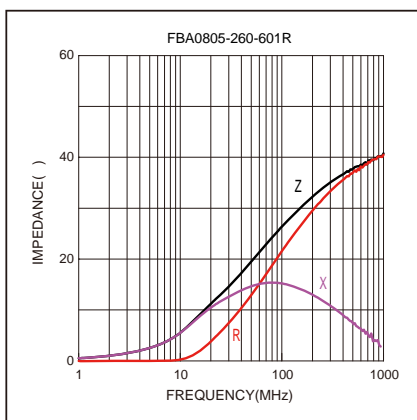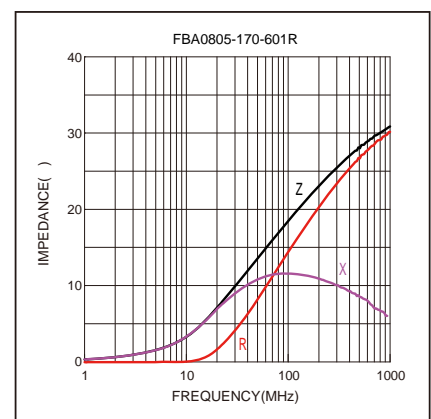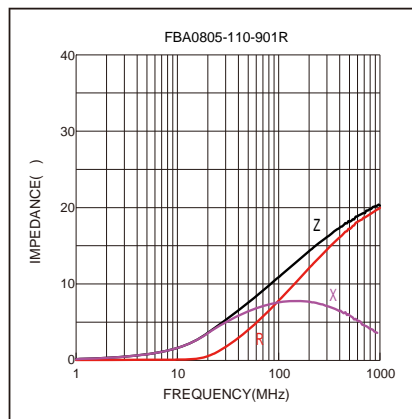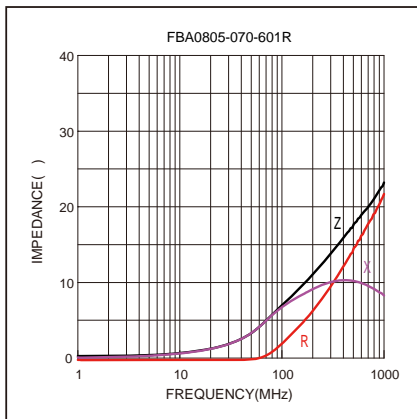


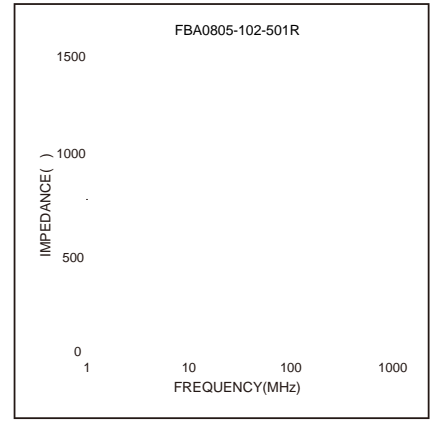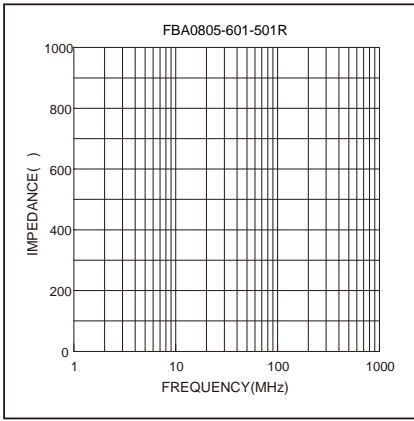

Soldering Reflow:


Packaging Information:

Tape Dimension:

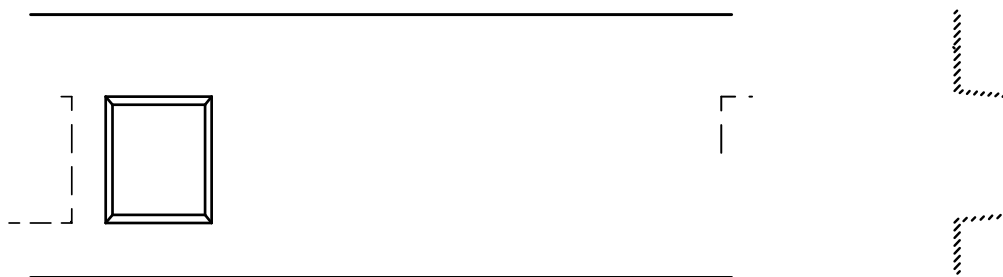


Series	A0 (mm)	B0 (mm)	D (mm)	P0 (mm)	P1 (mm)	W (mm)	K0 (mm)	E (mm)	T (mm)
0805	1.30±0.05	2.10±0.05	1.5±0.1	4.0±0.1	4.0±0.1	8.0±0.3	0.95±0.05	1.75±0.1	0.95±0.05

Peel force of top cover tape:

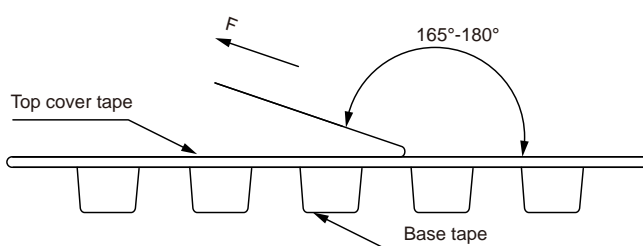


The peel force of top cover tape shall be between 0.14 to 0.58 N

Reel Dimension: [mm]

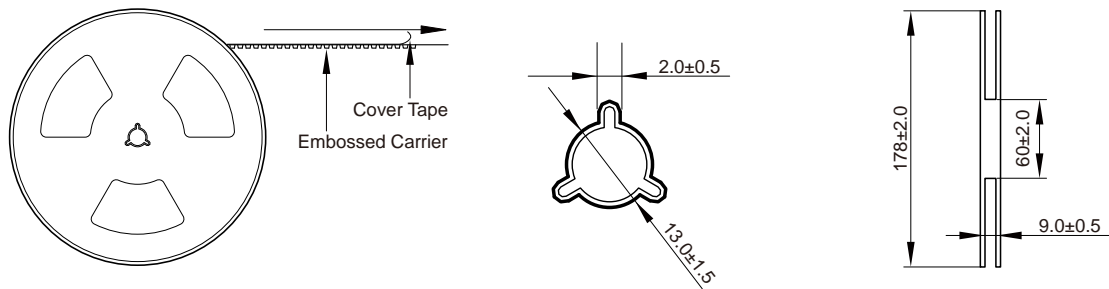

Packaging Quantity:

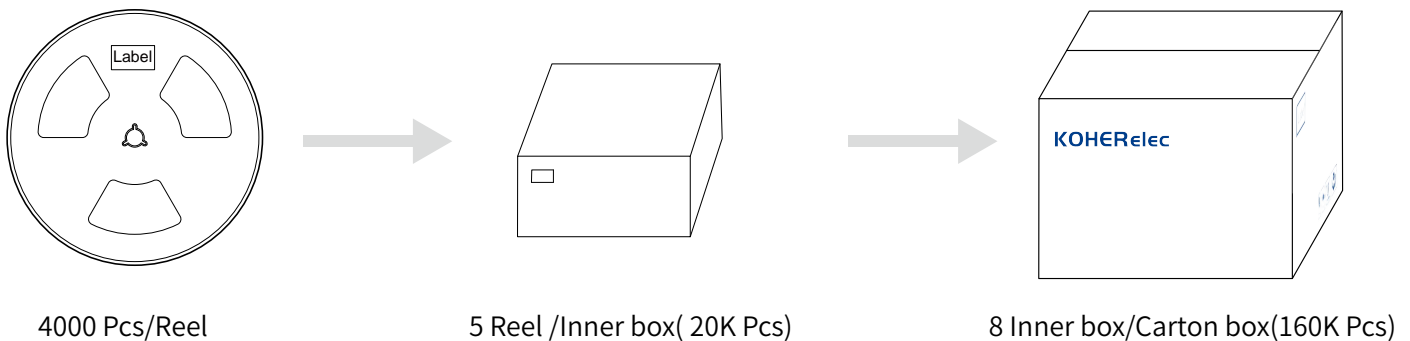

Cautions and Warnings:

Storage Conditions:

- The storage period is within 12 months after the completion of production. Be sure to follow the storage conditions (temperature: -5 to 35°C, humidity: 75% RH Max). If the storage period elapses, the soldering of the terminal electrodes may deteriorate. The warranty period is one year.
- Product should not be exposed to environment with high temperature, high humidity, dust, corrosive gas and etc.
- Products should be handled with care to avoid damage or contamination from perspiration and skin oils.
- Please always handle products carefully to prevent any damage caused by dropping down or inappropriate removing.

Operation Instructions:

- Self heating (temperature increase) occurs when the power is turned ON, so the tolerance should be sufficient for the set thermal design.
- Before soldering, be sure to preheat components. The preheating temperature should be set so that the temperature difference between the solder temperature and chip temperature does not exceed 150°C.
- Soldering corrections after mounting should be within the range of the conditions determined in the specifications. If overheated, a short circuit, performance deterioration, or lifespan shortening may occur.
- Generally, Koher might not be familiar with either customer's specific application or actual requests as customer does. As a result customer shall be responsible for checking and confirming whether Koher product with the performance described in the product specification is suitable for using in customer's particular application or not.