

# MD Series

## SMD Low Profile High Current Molded Inductor

### Size 1050




#### CHARACTERISTICS

- Molded type
- High saturation current due to CIP material
- Nature air gap and no acoustic noise
- Different sizes available
- Quantity: 500pcs


#### APPLICATION

- High current DC/DC converter
- LC filter

#### Dimensions: [mm]

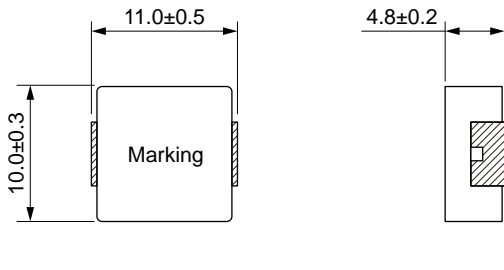

#### Land Pattern: [mm]

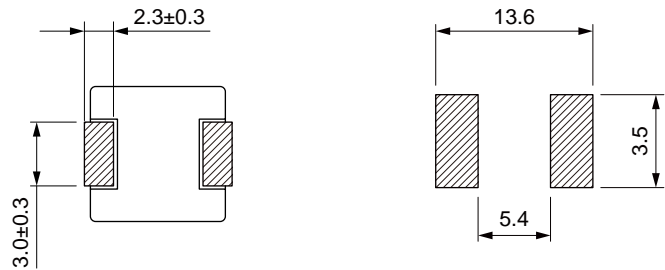

#### Electrical Properties:













	Inductance	Tolerance	Temperature Typ. (A)	Typ. (A)	Resistance Typ.	Resistance Max.
MD1050-R22M	0.22	±20%	45.0	70.0	0.45	0.50
MD1050-R56M	0.56	±20%	26.5	43.0	1.30	1.50
MD1050-1R0M	1.00	±20%	22.0	30.0	2.80	3.50
MD1050-1R5M	1.50	±20%	19.0	27.0	3.50	4.10
MD1050-2R2M	2.20	±20%	16.0	24.0	5.40	6.00
MD1050-3R3M	3.30	±20%	14.0	22.0	9.00	10.4
MD1050-4R7M	4.70	±20%	13.0	19.0	10.0	12.5
MD1050-5R6M	5.60	±20%	10.0	16.0	14.0	16.8
MD1050-6R8M	6.80	±20%	9.50	15.0	16.5	21.0
MD1050-8R2M	8.20	±20%	9.00	14.5	18.5	24.0
MD1050-100M	10.0	±20%	8.00	13.5	25.0	29.0
MD1050-150M	15.0	±20%	5.50	9.50	37.0	45.0
MD1050-220M	22.0	±20%	5.00	9.00	50.0	60.0
MD1050-330M	33.0	±20%	4.30	7.50	80.0	92.0
MD1050-470M	47.0	±20%	3.80	6.50	125	145

Operating temperature: -40°C ~ +125°C

Temperature rise current: The actual value of DC current when the temperature rise is T40C

Saturation Current will cause L to drop approximately 30%

# Typical Electrical Characteristics:

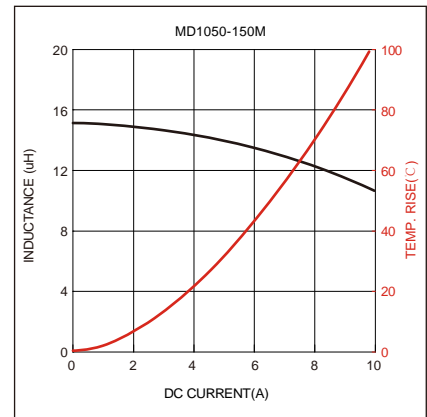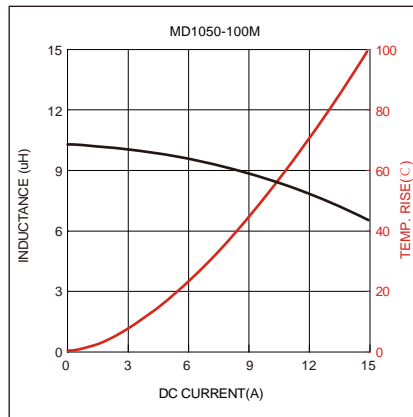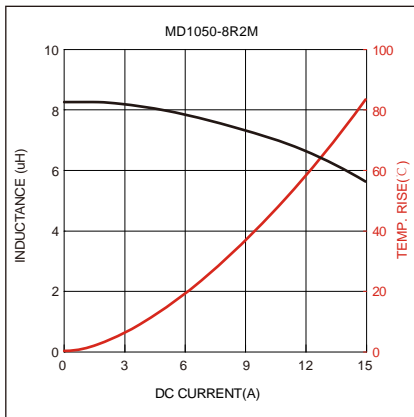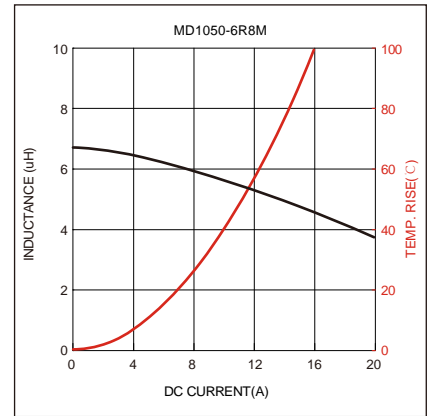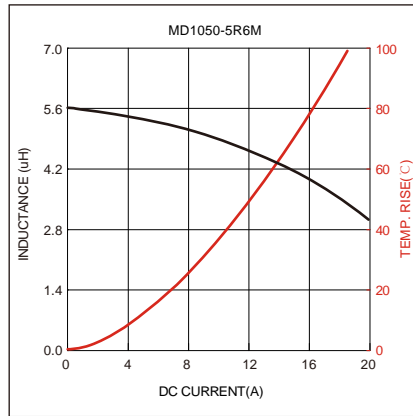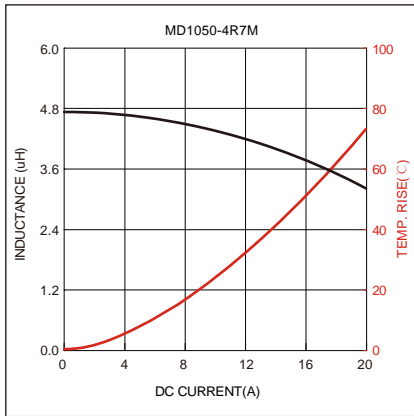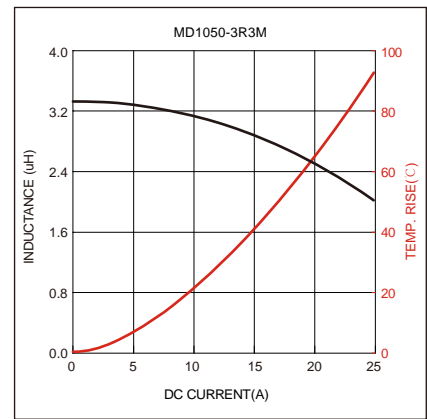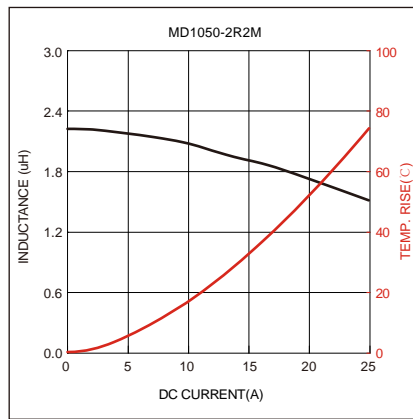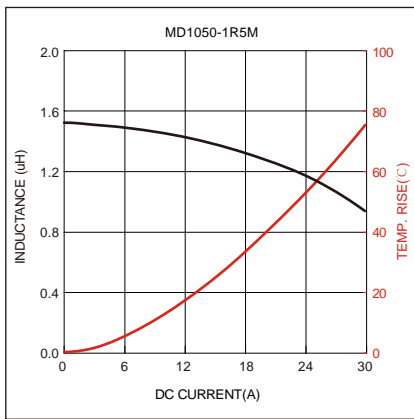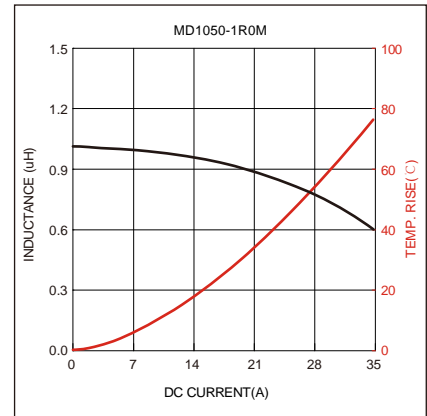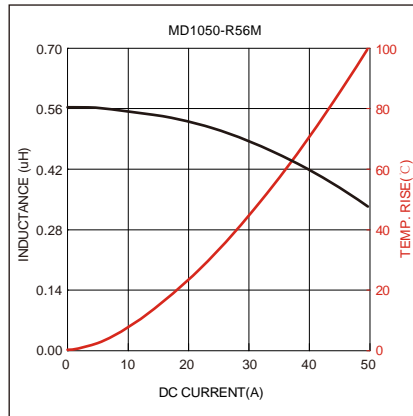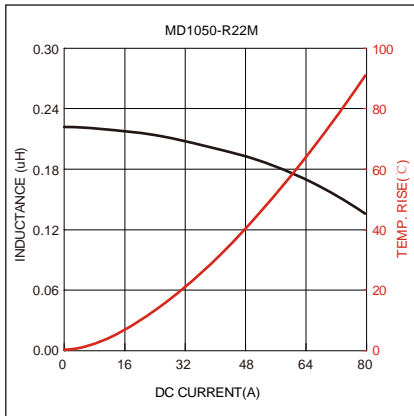

## Typical Electrical Characteristics:

